



- 无刷结构是无刷伺服电机的理想选择
- 最短的安装深度
- 最高 125℃ 工作环境温度
- 提供抗辐射型号




Most Models

特性参数

型号	速度	励磁线圈	精度 ± 角分	输入电压 (Vrms)	频率 (Hz)	最大输入电流 (mA)	变压比 (V 输出 / V 输入 ± 10%)	相移 (度)	总值零位 电压(mA)
11BRW-300-B	1	定子	10	12.0	400	10.9	1.75	12	30
11BRW-300-F	1	定子	7	12.0	2,500	3.1	0.50	-2	30
11BRW-300-M	1	定子	7	10.0	5,000	8.3	0.50	-5	30
11BRCT-300-F	2	定子	10	12.0	2,500	8.3	0.50	0	15
11BRCT-300-M	2	定子	10	11.8	2,500	70.0	1.02	-1	30
11BRCT-300-T	4	定子	5	12.0	2,500	6.0	0.53	-2	15
11BRCT-300-P	5	定子	4	12.0	2,500	1.4	0.39	-7	15
11BRCX-300-A	1	转子	7	7.5	4,000	13.5	0.54	-2	20
11BRCX-300-B	1	转子	7	7.5	4,000	40.0	1.07	-2	15
11BRCX-300-C	1	转子	7	6.0	1,000	15	0.45	4	15
11BRCX-300-G	1	转子	7	26.0	400	40.0	0.45	12	30
11BRCX-300-J	1	转子	7	7.0	5,000	10.9	0.95	-6	15
11BRCX-300-N	1	转子	7	8.5	1,000	14.0	1.00	3	30
11BRCX-300-M	2	转子	7	7.0	5,000	10.9	0.95	-2	30
11BRCX-300-T	4	转子	7	7.0	5,000	11.0	0.84	7	20
11BRCX-300-P	5	转子	6	10.0	5,000	5.0	0.55	-3	20
R11-S01F-1A	1	转子	20	1.88	2,250	21.0	1.40	11	15
R11-S01F-1B	1	转子	20	6.00	2,000	12.0	0.454	8.5	15
R11-S01F-1A	1	转子	6	1.88	2,250	21.0	1.40	11	15

* 速度定义为：1= 单转速；2=2 倍速；类推

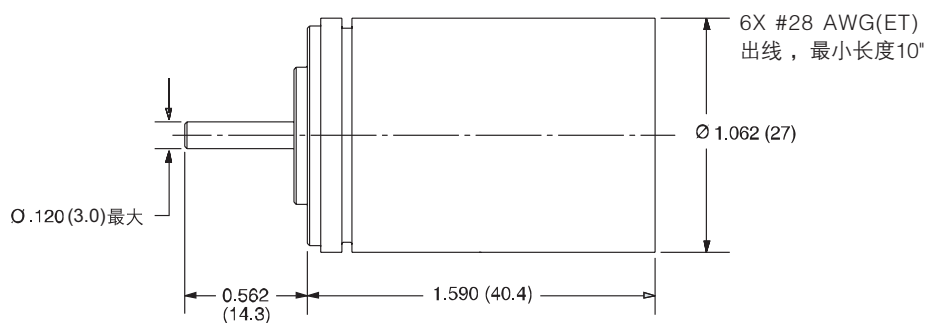



规格


- 宽尺寸范围 10 ~ 55
- 提供多种速度
- 温度范围可达 200°C
- 提供抗辐射型号




型号	典型厚度 英寸 (mm)	最小外径 (mm)	最大内径 (mm)
10BRCX	.65 (16.5)	1.05 (26.5)	.237 (6.0)
15BRCX	1.00 (25.4)	1.45 (36.8)	.472 (12.0)
21BRCX	1.25 (31.8)	2.06 (52.4)	.8007 (20.34)
31BRCX	1.25 (31.8)	3.05 (77.5)	1.5763 (40.04)
55BRCX	1.25 (31.8)	5.50 (139.7)	3.6515 (92.75)


* 作为变送器和控制变压器类型提供

配置指南

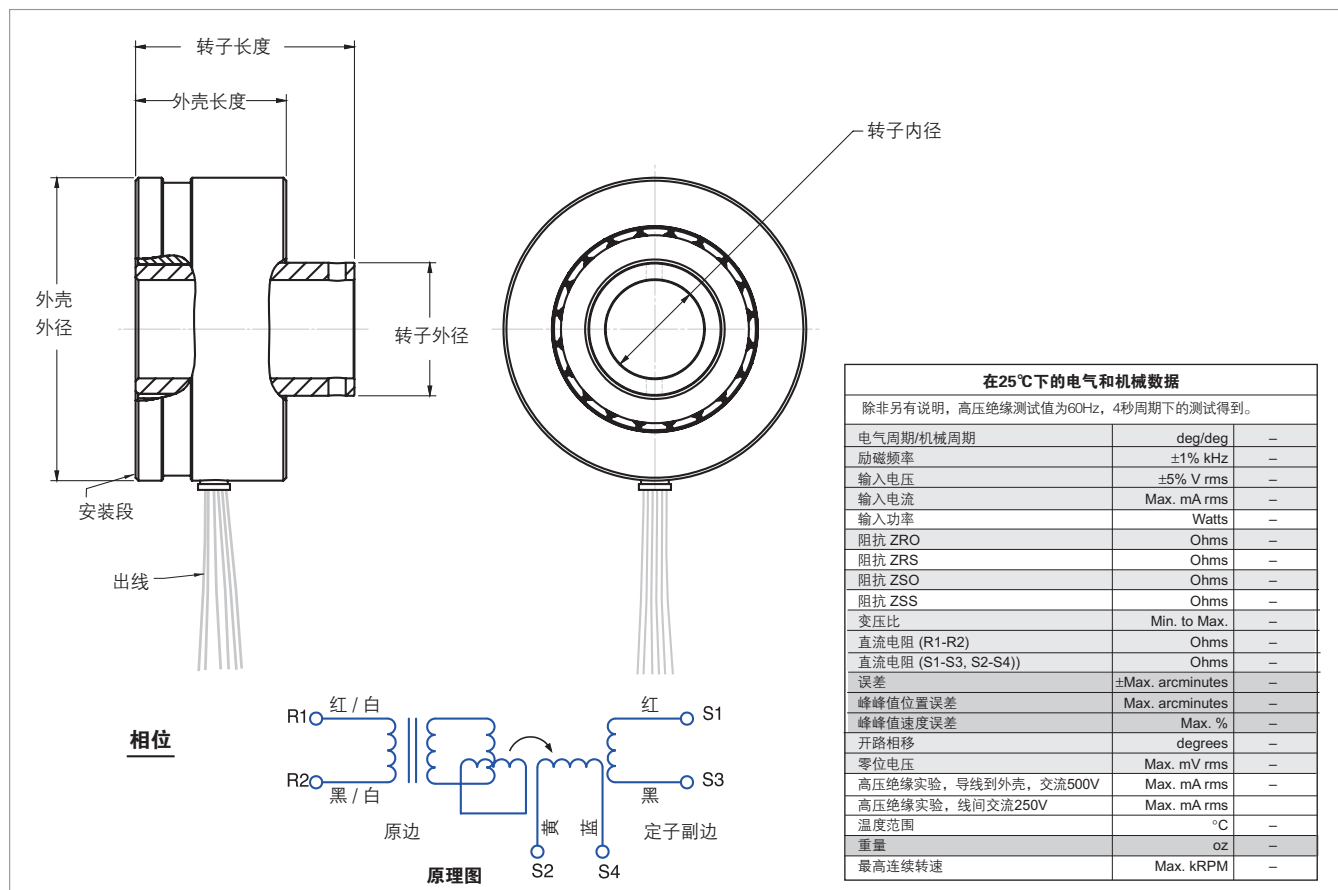

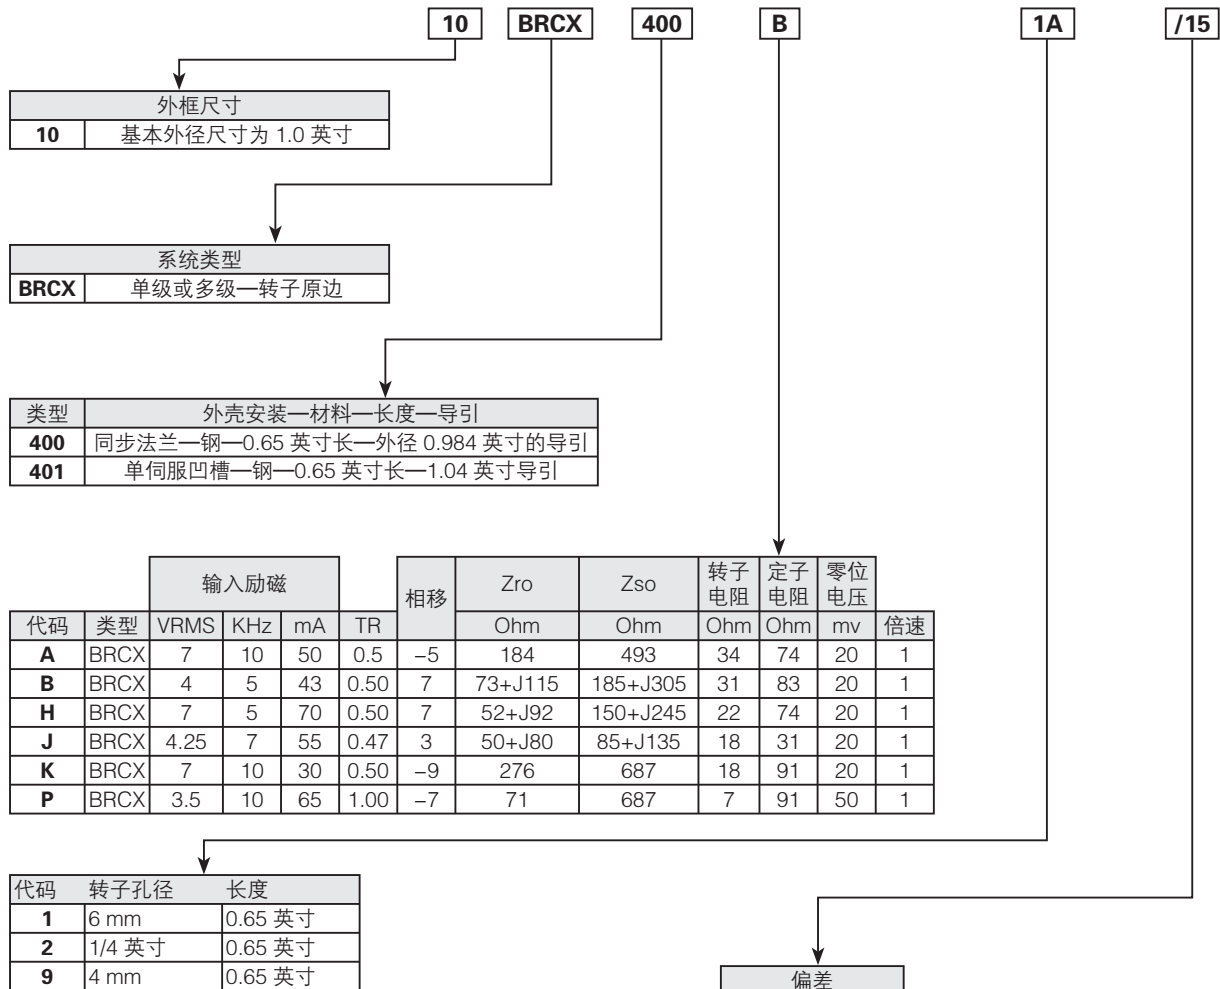

产品编号	偏差			相位	出线		特点	重量 (盎司)
	峰峰值	+/-	速度 %		AWG	英寸		
10BRCX-400-B1A/15	X	15	X	CW	28	24	X	1.3
10BRCX-401-A1/20	X	20	X	CCW	28	10	X	1.3
10BRCX-401-A1H/20	X	20	X	CCW	28	12	高温, 轴向出线	1.3
10BRCX-401-A1HL	X	20	X	CCW	26	79	高温, 轴向出线	1.3
10BRCX-401-A1HR	X	20	X	CCW	28	12	Hi-Temp	1.3
10BRCX-401-A1HT	X	20	X	CCW	26	79	高温, 轴向出线	1.3
10BRCX-401-A2C/20	X	20	X	CCW	28	12	X	1.3
10BRCX-401-A2H	X	20	X	CCW	28	12	Hi-Temp	1.3
10BRCX-401-A2HR	X	20	X	CCW	28	12	高温, 轴向出线	1.3
10BRCX-401-B1A/15	X	15	X	CW	28	24	X	1.3
10BRCX-401-B1A/20	X	20	X	CW	28	12	X	1.3
10BRCX-401-B1T/20	X	20	X	CW	26	12	径向出线	1.3
10BRCX-401-B2T	X	20	X	CW	26	16	径向出线	1.3
10BRCX-401-B2TA	X	20	X	CW	26	36	径向出线	1.3
10BRCX-401-B9T	X	20	X	CW	26	16	径向出线	1.3
10BRCX-401-H1/15	X	15	X	CCW	28	12	X	37g
10BRCX-401-H1V	X	15	X	CCW	28	12	高压	37g
10BRCX-401-J1A/15	X	15	X	CW	28	28	屏蔽管线	1.3
10BRCX-401-J2/15	X	15	X	CW	28	18	屏蔽管线	1.3
10BRCX-401-K1	30	X	X	CW	28	2	X	1.2
10BRCX-401-K1C	30	X	X	CW	电缆	25	X	1.2
10BRCX-401-K1CE	30	X	X	CW	电缆	45	X	1.2
10BRCX-401-K1E	30	X	X	CW	电缆	25	X	1.2
10BRCX-401-P1	30	X	X	CW	28	2	X	1.2

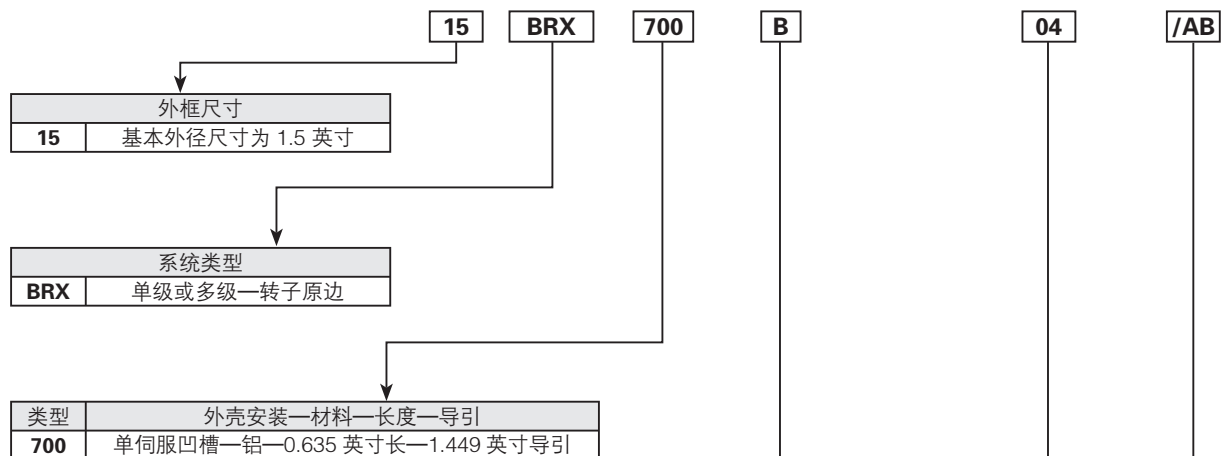

代码	类型	输入励磁					相移	Zro	Zso	转子电阻	定子电阻	零位电压	倍速
		VRMS	KHz	mA	TR			Ohm	Ohm	Ohm	Ohm	mv	
B	BRCX	2	10	50	0.98	+10		50	810	23	116	30	1
Except-B04AB		5	10	20	0.42	-8		295	820	60	116	20	1
D	BRCX	8	8	50	0.50	0		182	627	55	116	30	1
F	BRCX	4	5	45	0.50	1.5		129	461	23	116	20	1

代码	转子孔径	长度
4	3/8 英寸	1 英寸
10	3/8 英寸	0.635 英寸
14	3/8 英寸带平台	0.635 英寸

产品编号	偏差			相位	出线		特点	重量 (盎司)
	峰峰值	+/-	速度 %		AWG	英寸		
15BRX700-B04AB	20	X	X	CCW	28	40	X	67g
15BRX700-B10AA	20	X	2.40	CW	28	2	X	2.11
15BRX700-D10AA	16	X	2.50	CW	28	12	X	2.11
15BRX700-D10AC	16	X	2.50	CW	电缆	24	X	2.11
15BRX700-D10AD	16	X	2.50	CW	28	4	X	2.11
15BRX700-D10AE	16	X	2.50	CW	电缆	20	X	2.11
15BRX700-D10AF	16	X	2.50	CW	电缆	64	X	58g
15BRX700-D10AF	16	X	2.50	CW	电缆	64	X	2.11
15BRX700-D10AG	16	X	2.50	CW	电缆	45	X	58g
15BRX700-D10AH	16	X	2.50	CW	电缆	125	X	2.11
15BRX700-D10AJ	16	X	2.50	CW	电缆	45	X	2.11
15BRX700-D10AK	16	X	2.50	CW	电缆	124	X	58g
15BRX700-D10AL	16	X	2.50	CW	28	6	X	2.11
15BRX700-D14AA	16	X	2.50	CW	28	300mm	X	37g
15BRX700-F10AA	20	X	X	CCW	26	12	X	65g

电机反馈系统

无框架旋转变压器

交流同步和直流无刷电机

旋转变压器

15

BRCX

401

A

21

/10

外框尺寸

15基本外径尺寸为 1.5 英寸

系统类型

BRCT多倍速 – 定子原边

BRCX单速或多倍速 – 转子原边

BRW单速 – 定子原边

类型

401同步法兰—钢—0.635 英寸长—1.417 英寸导引(备注 #1)

402双伺服凹槽—钢—0.635 英寸长—1.449 英寸导引 (备注 #2)

500单伺服凹槽—钢—1.0 英寸长—1.449 英寸导引(备注 #2)

510单伺服凹槽—钢—1.0 英寸长—1.449 英寸导引

600单伺服凹槽—铝—1.0 英寸长—1.449 英寸导引

601单伺服凹槽—铝—0.635 英寸长—1.449 英寸导引(备注 #3)

602双伺服凹槽—铝—0.635 英寸长—1.449 英寸导引(备注 #4)

604双伺服凹槽 – 钢 – 16mm长—36.8mm导引(备注 #5)

备注:

1. 15BRW-401-A51/20 采用 铝外壳

2. XXXXXX 采用双伺服凹槽

3. XXXXXX 采用 0.635 英寸长 ,1.417 英寸导引

4. xxxxxxxx 采用单伺服凹槽

5. XXXXXX 是 20mm 长

输入激励

VRMSKHzmA

TR

相移

ZroZso

转子电阻定子电阻零位电压

代码

类型

3.5560.50

+11

735+J1435270+J580

365150302

A

BRCX

104.5580.50

+12

110+J165280+J370

43172301

除了 -A10A/10

84220.25

+12

210+J375155+J255

9883201

B

BRCX

710400.50

-7

78+J19045+J130

19105201

除了 -B10F

710450.50

3

193507

3794201

C

BRCX

7.56.6551.00

-1

75+J145360+J600

20166301

D

BRCX

410160.47

-4

322856

24126202

F

BRCX

45230.50

+6

105+J170200+J270

4194251

G

BRCX

26451.00

+5

28+J41167+J107

7.563151

J

BRCX

4.257550.47

+4

42+J7270+J107

1430201

K

BRCX

710320.50

-9

279697

34124501

L

BRCX

4.2510350.47

+7

65+J135155+J380

1263203

P

BRCX

3.510651.00

-9

67697

8.5124501

T

BRCX

78450.50

+21

1691210

30170204

AL

BRCX

78500.50

+4

150455

35110301

A

BRW

3.5570.50

+15

800+J1450300+J490

282170301

代码

转子孔径

长度

4

3/8 英寸

1 英寸(备注 #1)

10

3/8 英寸

0.635 英寸

12

1/4 英寸

1 英寸

13

1/4 英寸 带键

1 英寸

15

1/4 英寸 带键

0.635 英寸

17

.437 英寸

1.53 英寸

21

8 mm

0.635 英寸

23

.376 英寸

1.19 英寸

27

10 mm

0.635 英寸

36

3/8 英寸 带键

0.635 英寸

40

3/8 带固定螺丝

1.19 英寸

43

特殊-见图纸

1 英寸

44

7/16 英寸 带键

1 英寸

46

12 mm

16 mm(备注 #2)

47

1/4 英寸 带键

0.635 英寸

48

8mm 带键

0.635 英寸

备注:

1. 除了 15BRCX-500-F4CA 是 12mm。

2. 除了 15BRCX-604-AL46L 是 20mm 长。

偏差

峰值角分

+/-

速度 %

出线

相位AWG英寸

特点

重量(盎司)

产品编号

15BRCT-401-A21/20

X20X

CCW2812

X3

15BRCX-401-A21/10

X10X

CCW2612

X3

15BRCX-401-A21H/10

X10X

CCW2612

高温3

15BRCX-401-A48/10

X10X

CCW2812

X3

15BRCX-401-A48H/10

X10X

CCW2812

高温3

15BRCX-402-A10A/10

X10X

CCW2812

屏蔽3

15BRCX-402-B10A/10

X10X

CCW2812

屏蔽3

15BRCX-402-L10/8

X8X

CCW2812

X2.6

15BRCX-402-L10A

X8X

CCW2912

灵活夹持2.6

15BRCX-402-L10S/8

X8X

CW2812

带连接头2.6

15BRCX-500-C4A-10

X10X

CCW2612

屏蔽2.6

15BRCX-500-F12/10

X10X

CCW2612

X4.5

15BRCX-500-F12B/10

X10X

CCW2624

X4.5

15BRCX-500-F12C/10

X10X

CCW2612

屏蔽4.5

15BRCX-500-F12T/10

X10X

CCW2612

径向出线4.5

15BRCX-500-F13/10

X10X

CCW2612

X4.5

15BRCX-500-F13/15

X15X

CCW2612

X4.5

15BRCX-500-F13P/10

X10X

CCW2636

粉末喷涂4.5

15BRCX-500-F13PH

X10X

CCW2636

粉末喷涂4.5

15BRCX-500-F36HV/10

X10X

CCW2612

1600V 高压绝缘 & 高温4.5

15BRCX-500-F36HVT/10

X10X

CCW2612

1600V 高压绝缘 & 高温4.5

15BRCX-500-F4

X7X

CCW2624

X4.5

15BRCX-500-F40/10

X10X

CCW2612

X4.5

15BRCX-500-F4A/10

X10X

CCW2612

X4.5

15BRCX-500-F4C/10

X10X

CCW2612

屏蔽4.5

15BRCX-500-F4CA

X10X

CW2812

轴向出线115

15BRCX-500-F4T/10

X10X

CCW2624

径向出线4.5

15BRCX-500-G44

X7X

CCW2612

X4.5

15BRCX-500-G4B

X7X

CCW2612

屏蔽4.5

15BRCX-500-J12

X7X

CCW2412

X4.5

15BRCX-500-J23

X7X

CCW2412

X4.5

15BRCX-500-J36/15

X15X

CCW2412

X4.5

15BRCX-500-J4

X7X

CCW2424

屏蔽4.5

15BRCX-510-L36P

10X

XCCW2612

高温4.5

15BRCX-600-G4

X7X

CCW2612

X3.5

15BRCX-600-J17

X7X

CCW2426

X4.5

15BRCX-600-J17A

X7X

CCW2430

屏蔽4.5

15BRCX-600-J17TA

X7X

CCW2654

屏蔽 & 径向出线4.5

15BRCX-600-J43

X7X

CCW2424

屏蔽3.5

15BRCX-601-A46

X10X

CCW2617

X3

15BRCX-601-A46C

25X

XCCW2617

连接头导管出线66

15BRCX-601-K10

16X

2.50CCW284

X2.6

15BRCX-601-K10C

16X

2.50CW284

X2.6

15BRCX-601-K10CE

16X

2.50CCW2812

X2.6

15BRCX-601-K10CF

16X

2.50CW2812

X2.6

15BRCX-601-K10CG

16X

2.50CW63

X2.6

15BRCX-601-K10E

16X

2.50CW266

X2.6

15BRCX-601-K27CE

16X

2.50CCW12

X2.6

15BRCX-601-P10

16X

2.50CW282

X2.6

15BRCX-602-A46

X10X

CCW2617

X3

15BRCX-602-B10A/10

X10X

CW2812

X2.3

15BRCX-602-B10E

20X

XCW2812

X2.3

15BRCX-602-B10F

X10X

CW2824

X2.3

15BRCX-602-B10G

20X

XCW2812

X2.3

15BRCX-602-B21/10

X10X

CCW2812

X2.3

15BRCX-602-B21P

X10X

CW2812

粉末喷涂2.3

15BRCX-602-B27/10

X10X

CW2812

X2.3

15BRCX-602-B36

20X

XCCW2812

X2.3

15BRCX-602-B46C

X30X

CW2812

X2.3

15BRCX-602-BA10A/10

X10X

CCW2812

X2.3

15BRCX-602-BA36

20X

XCCW2812

高温2.3

15BRCX-602-BA47/10

X10X

CCW2812

X2.3

15BRCX-602-BA47C1

X10X

CCW2833

X2.3

15BRCX-602-BA47C2

X10X

CCW2829

X2.3

15BRCX-602-D10

20X

XCW2828

X2.6

15BRCX-602-D47/4

X4X

CCW2812

X2.6

15BRCX-602-F15A/15

X15X

CCW2412

X2.3

15BRCX-602-F15B/15

X15X

CCW24


X3.5

15BRCX-602-F15C/15

X15X

CCW15

X4.8

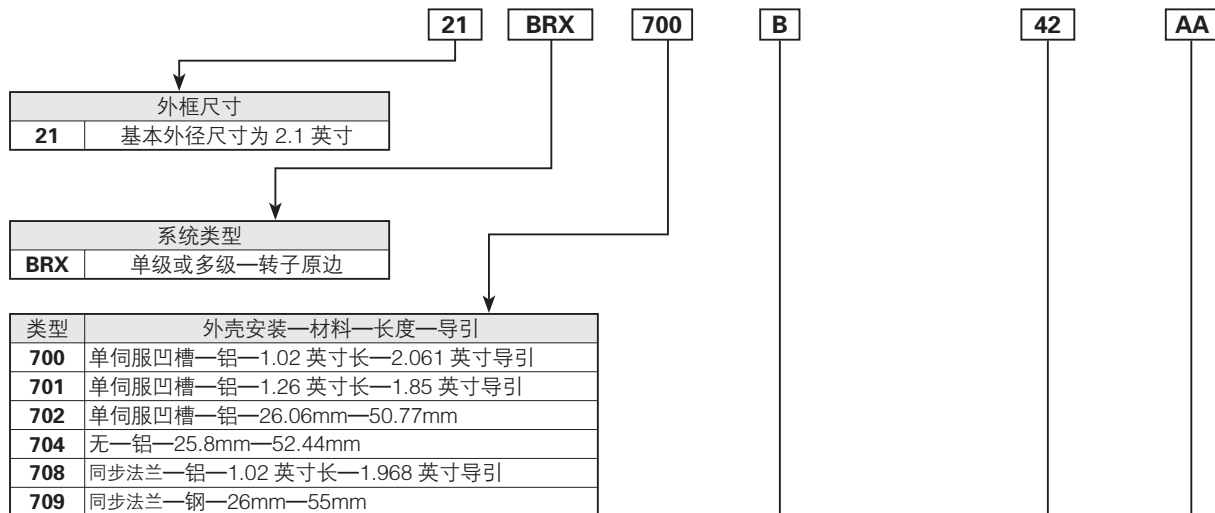

		输入励磁				相移	Zro	Zso	转子电阻	定子电阻	零位电压	倍速
代码	类型	VRMS	KHz	mA	TR		Ohm	Ohm	Ohm	Ohm	mv	
B	BRX	2	10	46	1.00	-3	56	602	18	120	30	1
C	BRX	6	7.5	25	0.33	-13	306	456	23	118	20	1
D	备注 #1	8	8	46	0.50	1	260	565	84	120	30	1
D	备注 #2	11.3	8	125	0.52	-7.5	107	235	17	44	20	1
E	BRX	6	6	28	0.31	-8	252	193	30	44	20	1
F	BRX	4	5	27	0.50	-4	178	400	27	116	25	1
H	BRX	4	4	55	0.45	10	94	143	27	45	25	1
J	BRX	7	10	40	0.50	-5	214	638	75	120	30	1

备注:

1. X700 除了 21BRX700-D11AC
2. 21BRX700-D11AC

代码	孔径	长度
3	0.8	26mm
6	0.63	1.02
11	0.67	1.49(备注 1)
11	17.04mm	25.8 mm (备注 2)
22	22mm	35mm

代码	孔径	长度
23	12mm	26.06mm
42	0.5	1.06
84	0.59	1.26
110	0.5	1.06

备注:

1. 用于 21BRX700-D11AC
2. 用于 21BRX704-F11BB

产品编号	偏差			速度 %	相位	出线		特点	重量 (盎司)
	峰峰值	+/-	角分			AWG	英寸		
21BRX700-B42AA	18	X	2.00	CW	28	7		X	200g
21BRX700-D110D	18	X	2.00	CCW	电缆	38		X	200g
21BRX700-D110L	18	X	2.00	CCW	电缆	69		X	200g
21BRX700-D11AC	15	X	X	CW	26	12		X	8
21BRX700-D42AA	18	X	2.00	CW	28	65		X	200g
21BRX700-D42AB	18	X	2.00	CW	28	24		X	200g
21BRX700-D42AC	18	X	2.00	CW	电缆	27		X	200g
21BRX701-C84AB	X	12	2.00	CW	26	15		X	7.4
21BRX702-J42AA	20	X	2.00	CW	28	305mm		X	200g
21BRX702-J42AB	20	X	2.00	CW	28	650mm		屏蔽	200g
21BRX704-F11BB	20	X	X	CW	26	250mm		导管出现和接线终端	210g
21BRX708-H06AA	20	X	X	CCW	26	12		X	190g
21BRX709-E03AA	24	X	X	CCW	26	220mm		X	128
21BRX709-E23AA	24	X	X	CCW	26	220mm		X	128
27BRX709-L22AA	20	X	X	CCW	28	300mm		紧固螺丝和导管出线	347g


电机反馈系统

交流同步和直流无刷电机

无框架旋转变压器

旋转变压器

21		BRCT		510		A		7		B/10	
外框尺寸											
21	基本外径尺寸为 2.1 英寸										
系统类型											
BRCT	多倍速 - 定子原边										
BRCX	单速或多倍速 - 转子原边										
类型											
外壳安装—材料—长度—导引											
335	单伺服凹槽 - 钢 - 1.35英寸长-2.061英寸导引										
500	双伺服凹槽 - 钢 - 1.25 英寸长-2.061英寸导引(备注 #1)										
501	单伺服凹槽 - 钢 - 1.06 英寸长-1.997 英寸导引(备注 #2)										
505	单伺服凹槽 - 钢 - 1.25 英寸长-2.061英寸导引										
508	同步法兰 - 钢 - 1.06 英寸长-1.967英寸导引										
510	单伺服凹槽 - 钢 - 1.25 英寸长-2.061英寸导引(备注 #3)										
511	单伺服凹槽 - 钢 - 1.06 英寸长-1.997英寸导引										
520	单伺服凹槽 - 钢 - 1.25英寸长-2.1英寸导引										
600	单伺服凹槽 - 铝 -1.35英寸长-2.061英寸导引(备注 #4)										
601	单伺服凹槽 - 铝 -1.06英寸长-2.061英寸导引										
607	双伺服凹槽 - 铝 -1.06英寸长-2.061英寸导引										
607	单伺服凹槽 - 铝 -1.06英寸长-2.061英寸导引										
610	双伺服凹槽 - 铝 -1.35英寸长-2.061英寸导引(备注 #5)										
611	双伺服凹槽 - 铝 -1.06英寸长-2.061英寸导引(备注 #6)										
616	同步法兰 - 铝 -1.25英寸长 -2.36英寸导引										
621	单伺服凹槽 - 铝 -1.26 英寸长 -1.85 英寸导引										
备注:											
1. 除了 E66,F10,F15,F8,F9-01,H20A, MA7 是单伺服凹槽											
2 除了 A42F是法兰安装和3英寸引导											
3 除了 21BRCT-510-A7B/10-01 是双伺服,除了 A7B/10和D7B/10没有伺服凹槽。											
4 除了 B042A, B042AD, B042B, B042BH, B042BL, B043A, B080BP, B091B, B091H, D39A/5 是 1.06英寸长。											
5 除了 21BRCT-610-LD12A是单伺服凹槽-钢外壳。											
6 除了 21BRCX-611-D42B/5 是 1.25英寸长, B09H,D39A/5 是 1.06英寸长。											
</											

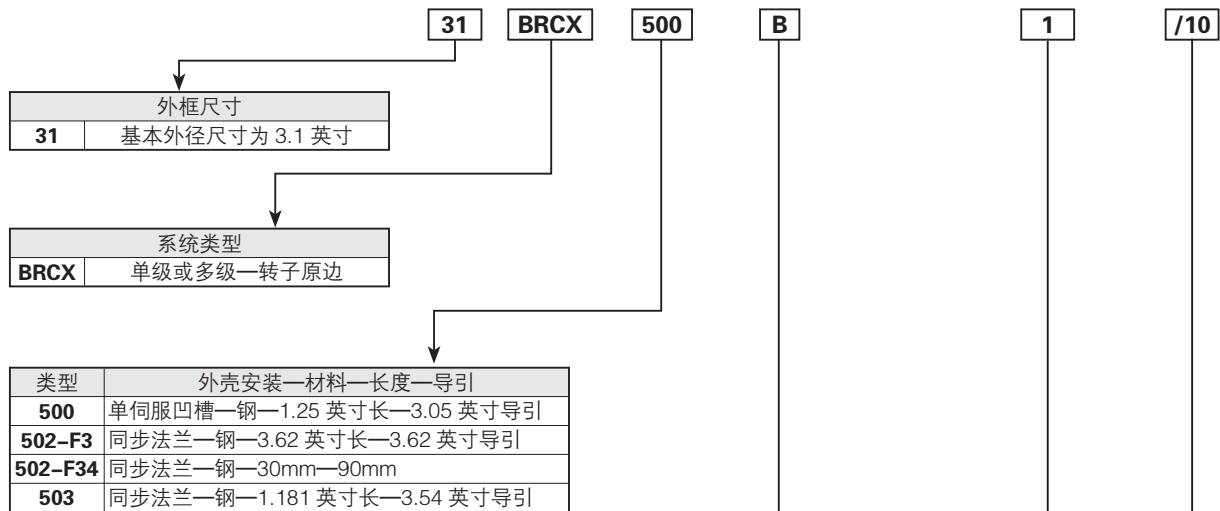

代码	类型	输入励磁					相移	Zro	Zso	转子电阻	定子电阻	零位电压	倍速
		VRMS	KHz	mA	TR			Ohm	Ohm	Ohm	Ohm	mv	
B	BRCX	4	5	30	0.50	1		90+J140	185+J280	34	71	20	1
B1	BRCX	4	5	30	0.50	1		75+J120	225+J385	35	93	20	1
D	BRCX	7	4	30	0.50	3		273	678	76	102	30	1
E	BRCX	15	1	100	0.45	Print		Print	Print	42	Print	35	1+8
J	BRCX	4.25	7	55	0.47	4		58+J78	115+J210	28	38	20	1
JD	BRCX	4.25	7	75	0.47	22		63	728	22	75	75	4
F3	BRCX	8	6.5	75	0.50	2		72+J105	170+J355	33	52	30	1
F34	BRCX	7	8	55	0.48	-6.5		156	473	44	69	75	1

代码	转子孔径	长度
1	1.5 英寸	1.25 英寸
3	1.37 英寸 带键	1.25 英寸
7	1.56 英寸	1.25 英寸
15	0.985 英寸	1.25 英寸
16	1.181 英寸	1.25 英寸
21	1.342 英寸	1.50 英寸
34	30mm	34mm


产品编号	偏差			速度 %	相位	出线		特点	重量 (盎司)
	峰峰值	+/-	角分			AWG	英寸		
31BRCX-500-B1/10	X	10	X	CCW	24	12		X	21
31BRCX-500-B1/20	X	20	X	CCW	24	12		X	21
31BRCX-500-B7/10	X	10	X	CCW	24	12		X	21
31BRCX-500-B7A	X	10	X	CCW	电缆	7		X	21
31BRCX-500-B7B	X	10	X	CCW	24	12		X	21
31BRCX-500-D1/10	X	10	X	CCW	24	12		X	21
31BRCX-500-D15/10	X	10	X	CCW	24	12		X	21
31BRCX-500-D16/10	X	10	X	CCW	24	12		X	21
31BRCX-500-E1A	X	见图	X	CCW	26	12		双	470g
31BRCX-500-E1B	X	见图	X	CCW	26	12		双	470g
31BRCX-500-J16/P	X	10	X	CCW	26	18		屏蔽管线 - 粉末喷涂	21
31BRCX-500-JD7	12	X	X	CCW	26	37		屏蔽	470g
31BRCX-502-F3/20	X	20	X	CW	26	17		导管出线	21
31BRCX-502-F34	30	X	X	CW	26	300mm		导管出线	470g
31BRCX-503-D21/15	X	15	X	CCW	24	12		转子定位螺钉	30

电机反馈系统

无框架旋转变压器

交流同步和直流无刷电机

旋转变压器

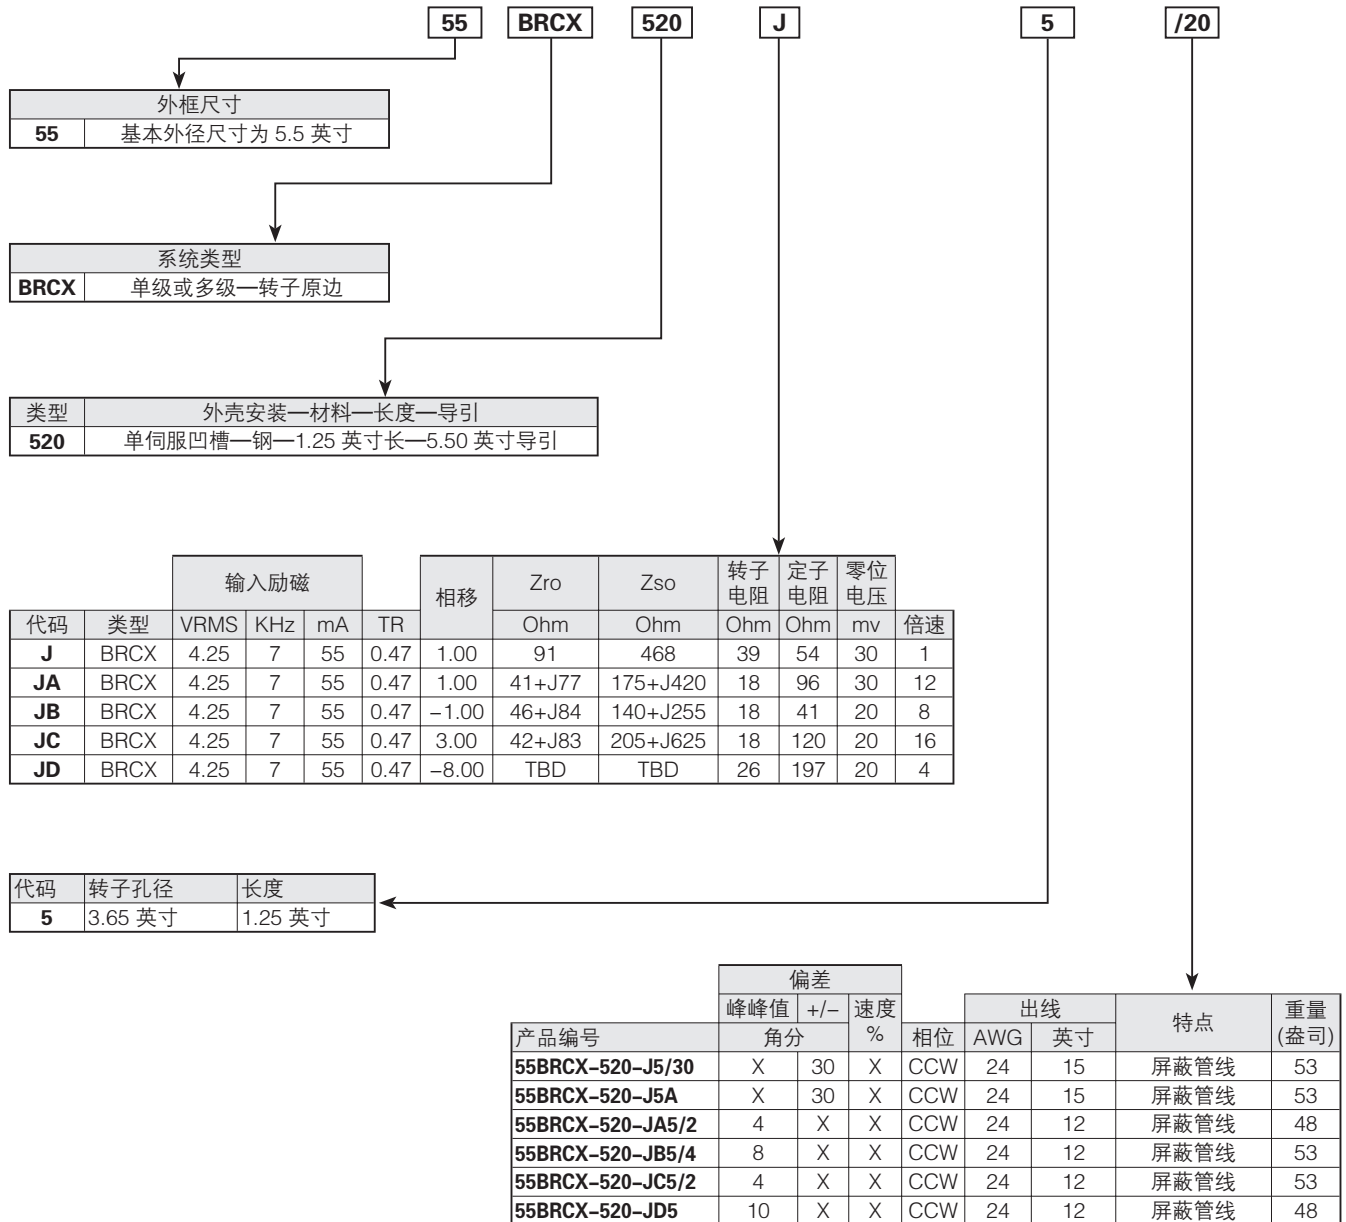





- 无外壳尺寸 15 伺服安装
- 轻型阳极氧化铝外壳
- 高精度机绕定子



请按照指南确定旋转变压器所需的特征。应用下图中的表参数,结合下一页的选型表,选择零件号。在订购之前, 请向厂家索取对应的图纸并审查。

配置指南

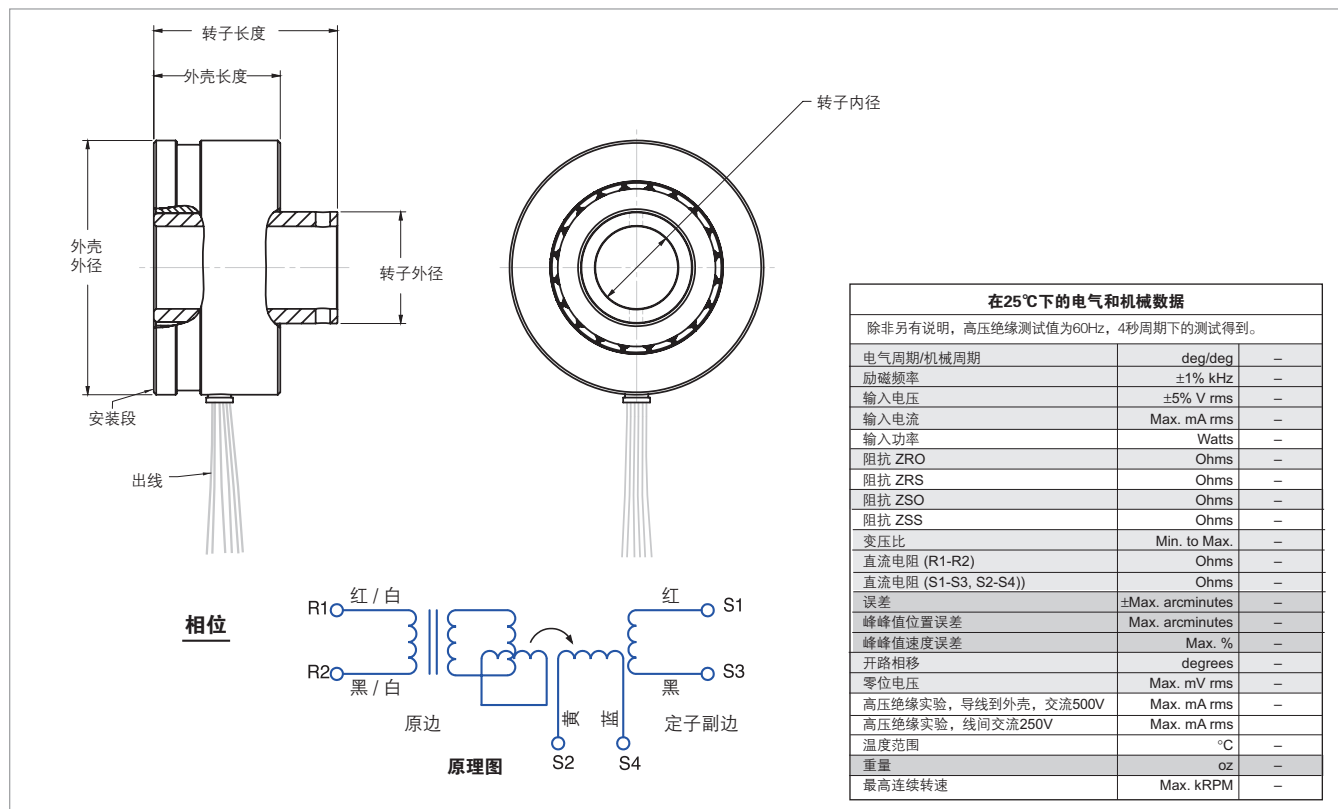

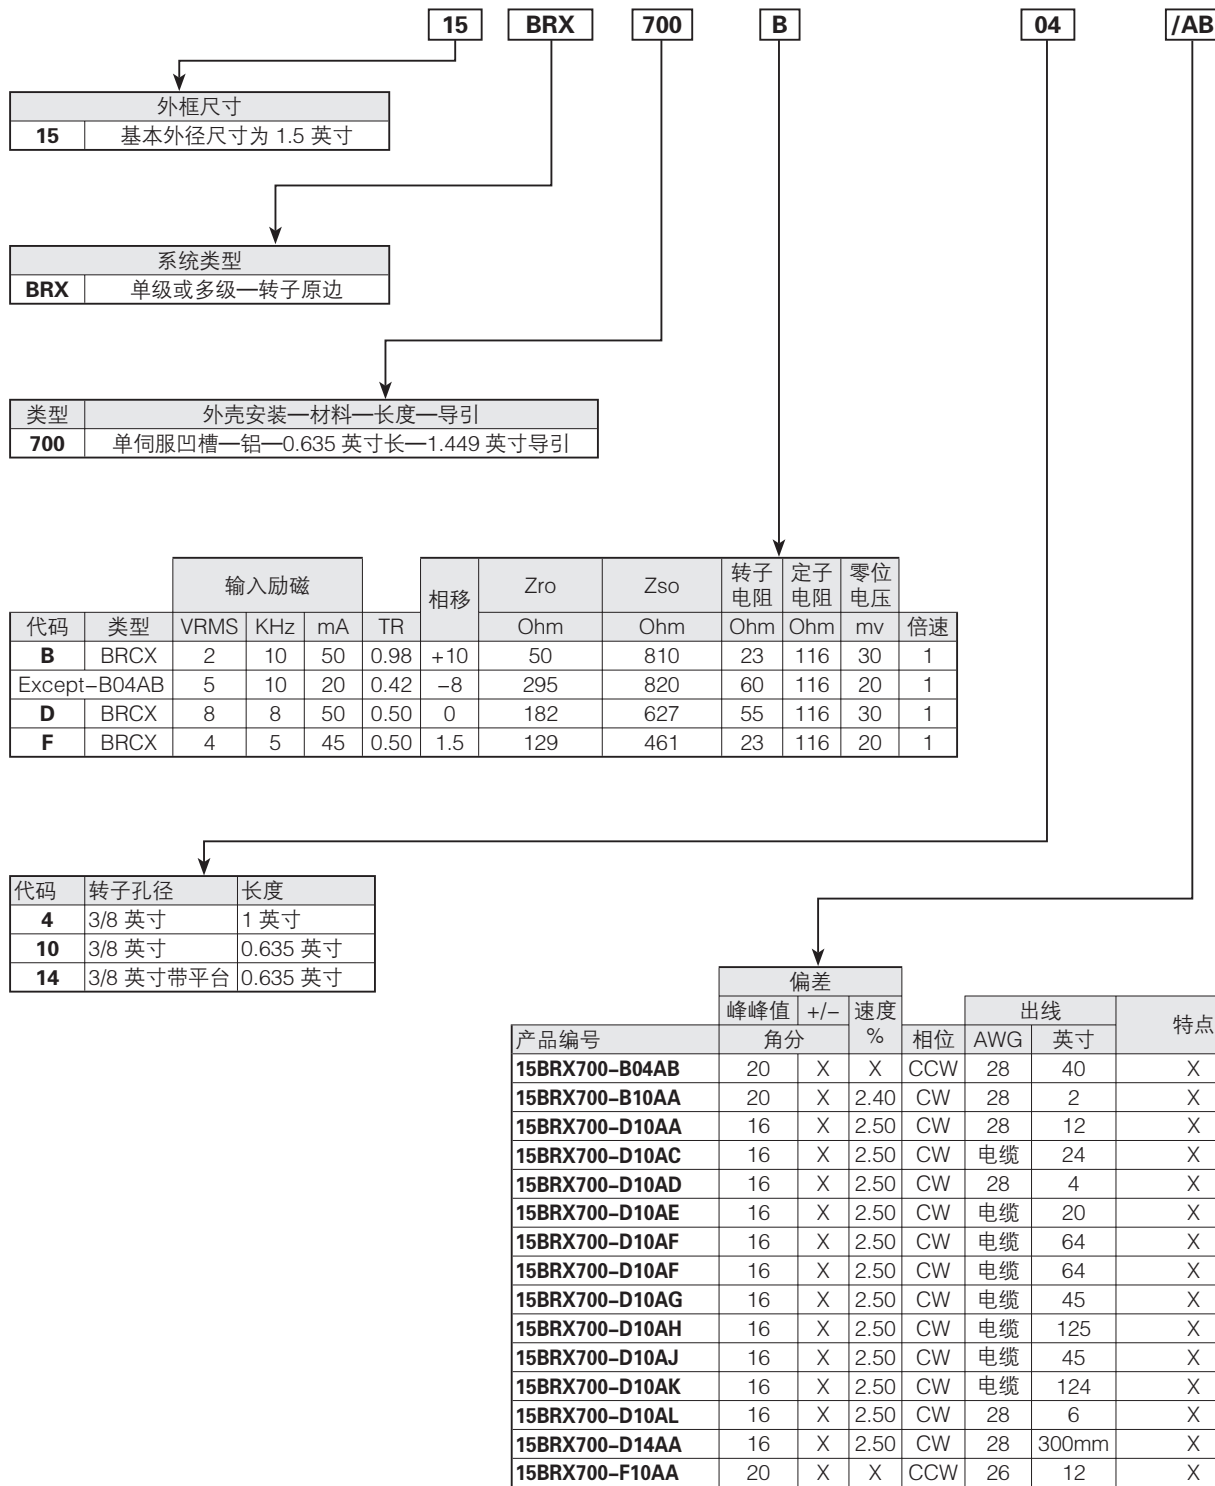





- 无外壳尺寸 21 伺服安装
- 轻型阳极氧化铝外壳
- 高精度机绕定子



请按照指南确定旋转变压器所需的特征。应用下图中的表参数,结合下一页的选型表,选择零件号。在订购之前, 请向厂家索取对应的图纸并审查。

配置指南

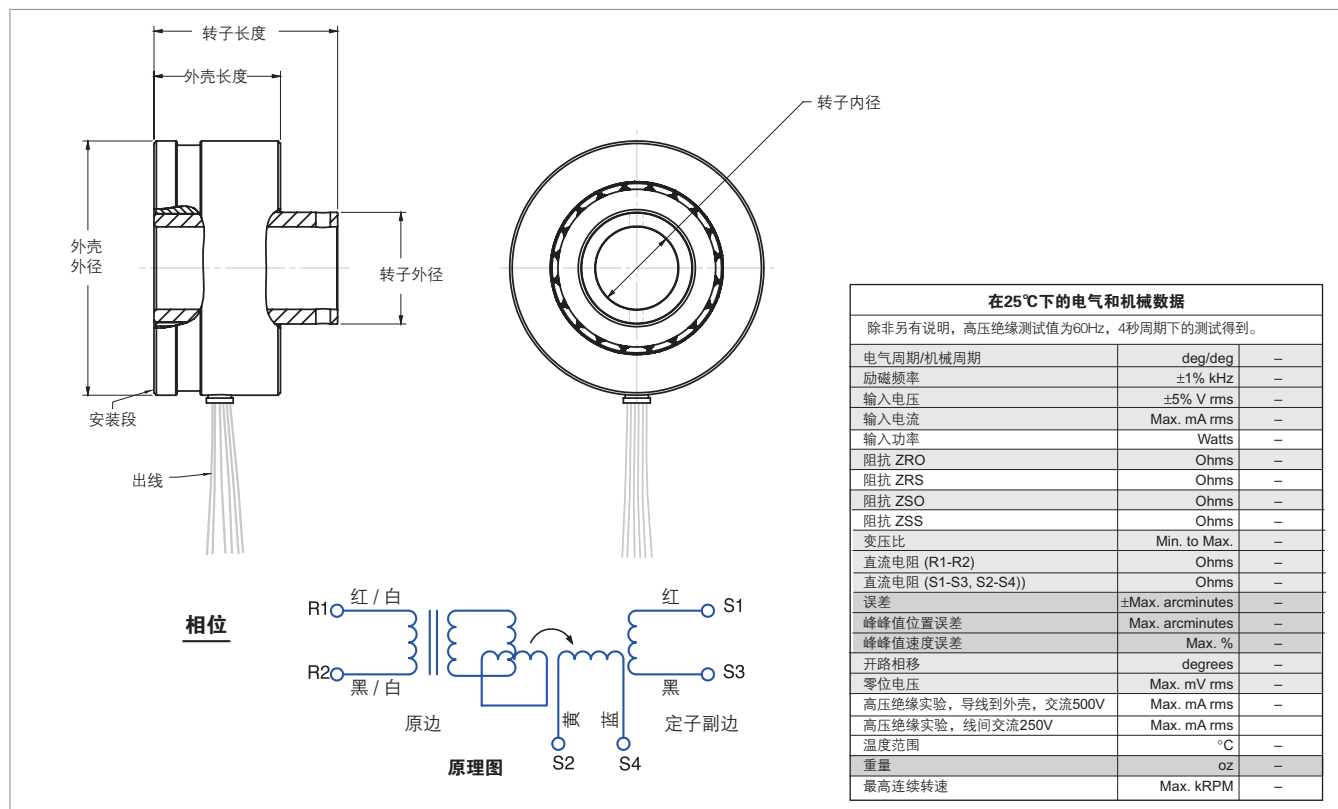

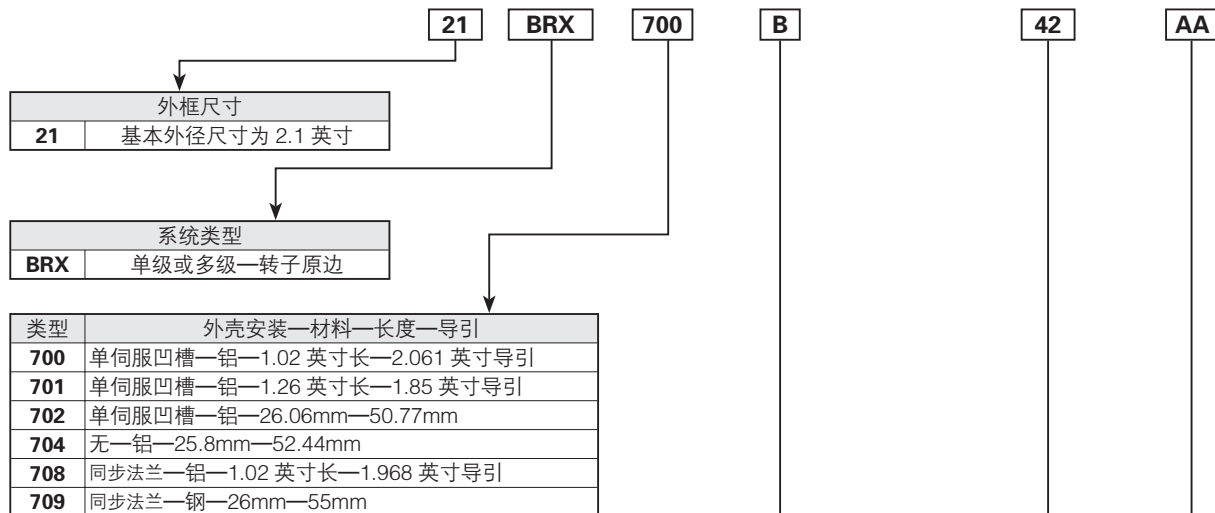

		输入励磁					相移	Zro	Zso	转子电阻	定子电阻	零位电压	倍速
代码	类型	VRMS	KHz	mA	TR			Ohm	Ohm	Ohm	Ohm	mv	
B	BRX	2	10	46	1.00	-3		56	602	18	120	30	1
C	BRX	6	7.5	25	0.33	-13		306	456	23	118	20	1
D	备注 #1	8	8	46	0.50	1		260	565	84	120	30	1
D	备注 #2	11.3	8	125	0.52	-7.5		107	235	17	44	20	1
E	BRX	6	6	28	0.31	-8		252	193	30	44	20	1
F	BRX	4	5	27	0.50	-4		178	400	27	116	25	1
H	BRX	4	4	55	0.45	10		94	143	27	45	25	1
J	BRX	7	10	40	0.50	-5		214	638	75	120	30	1

备注:

1. X700 除了 21BRX700-D11AC
2. 21BRX700-D11AC

代码	孔径	长度
3	0.8	26mm
6	0.63	1.02
11	0.67	1.49(备注 1)
11	17.04mm	25.8 mm (备注 2)
22	22mm	35mm

代码	孔径	长度
23	12mm	26.06mm
42	0.5	1.06
84	0.59	1.26
110	0.5	1.06

备注:

1. 用于 21BRX700-D11AC
2. 用于 21BRX704-F11BB

产品编号	偏差			速度 %	相位	出线		特点	重量 (盎司)
	峰峰值	+/-	角分			AWG	英寸		
21BRX700-B42AA	18	X	2.00	CW	28	7		X	200g
21BRX700-D110D	18	X	2.00	CCW	电缆	38		X	200g
21BRX700-D110L	18	X	2.00	CCW	电缆	69		X	200g
21BRX700-D11AC	15	X	X	CW	26	12		X	8
21BRX700-D42AA	18	X	2.00	CW	28	65		X	200g
21BRX700-D42AB	18	X	2.00	CW	28	24		X	200g
21BRX700-D42AC	18	X	2.00	CW	电缆	27		X	200g
21BRX701-C84AB	X	12	2.00	CW	26	15		X	7.4
21BRX702-J42AA	20	X	2.00	CW	28	305mm		X	200g
21BRX702-J42AB	20	X	2.00	CW	28	650mm		屏蔽	200g
21BRX704-F11BB	20	X	X	CW	26	250mm		导管出现和接线终端	210g
21BRX708-H06AA	20	X	X	CCW	26	12		X	190g
21BRX709-E03AA	24	X	X	CCW	26	220mm		X	128
21BRX709-E23AA	24	X	X	CCW	26	220mm		X	128
27BRX709-L22AA	20	X	X	CCW	28	300mm		紧固螺丝和导管出线	347g